
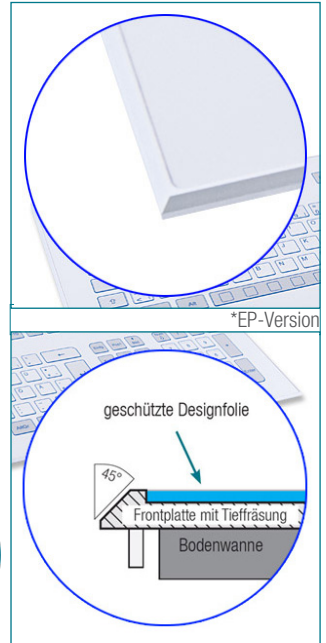


### TKS-105c-TB38-MODUL and EP\*

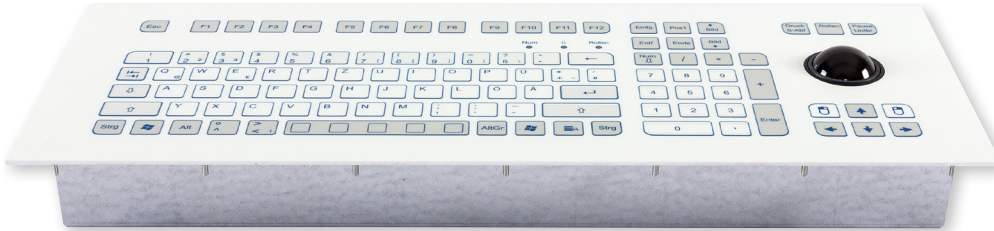

#### FEATURES

- Panel mount version with reserve side threaded bolts
- Excellent tactile feedback
- Key relief printing
- Chemical, abrasion and scratch resistant frontsheet
- Resistant against dirt, dust and liquids (IP65)
- Frontplate alternatively with edge protection
- Integrated 38 mm trackball

#### TECHNICAL DATA

Number of keys:	105	Operating temperature:	0 °C to +70 °C
Keyswitch technology:	short travel keys	Storage temperature:	-25 °C to +80 °C
Operating force:	2.6 N	Dimensions:	482.6 x 177.8 x 61.6 mm
Switch travel:	0.3 mm	Dimensions (with EP):	482.6 x 177.8 x 62 mm
Switching cycles:	approx. 3 mill. (per key)	Weight:	1300 g
Protection level (max):	IP65 static, IP54 dynamic		
Mounting type:	front panel with threaded bolts		
Front panel material:	aluminium		
Interfaces:	USB		
USB compatibility:	USB V1.1 compliance		

#### TECHNICAL DATA TRACKBALL

Ball diameter:	38 mm
Ball material:	phenolic resin
Operating principle:	mechanical



\*As a special feature, the EP version offers a deep milled front panel with a peripheral edge for optimum protection of the foil edge.

Cat.No.	Product description	Interface	Layout
KS18276	TKS-105c-TB38-MODUL-USB-DE	USB	German
KS18277	TKS-105c-TB38-MODUL-USB-US	USB	US
KS18367	TKS-105c-TB38-MODUL-EP-USB-DE with Edge Protection	USB	German
KS18368	TKS-105c-TB38-MODUL-EP-USB-US with Edge Protection	USB	US

Other language versions/interfaces/configurations available on request.

Subject to modifications and errors

## TECHNICAL DRAWING (in mm)

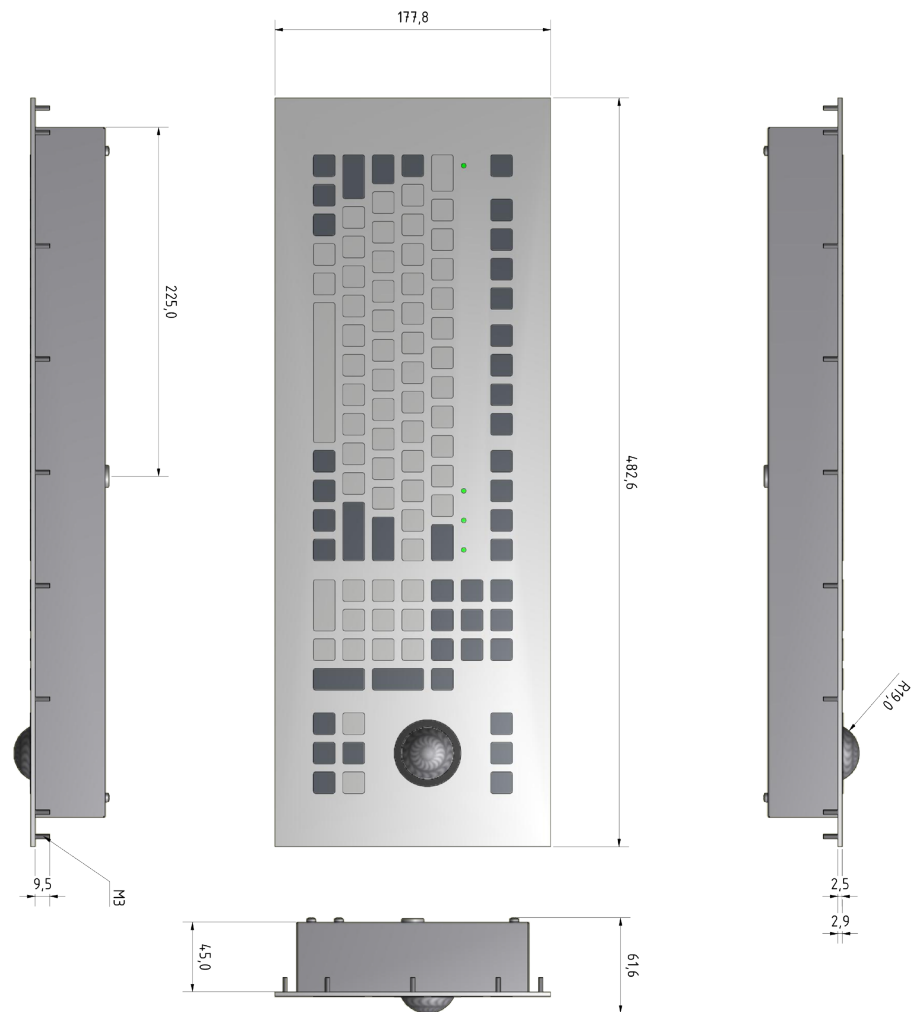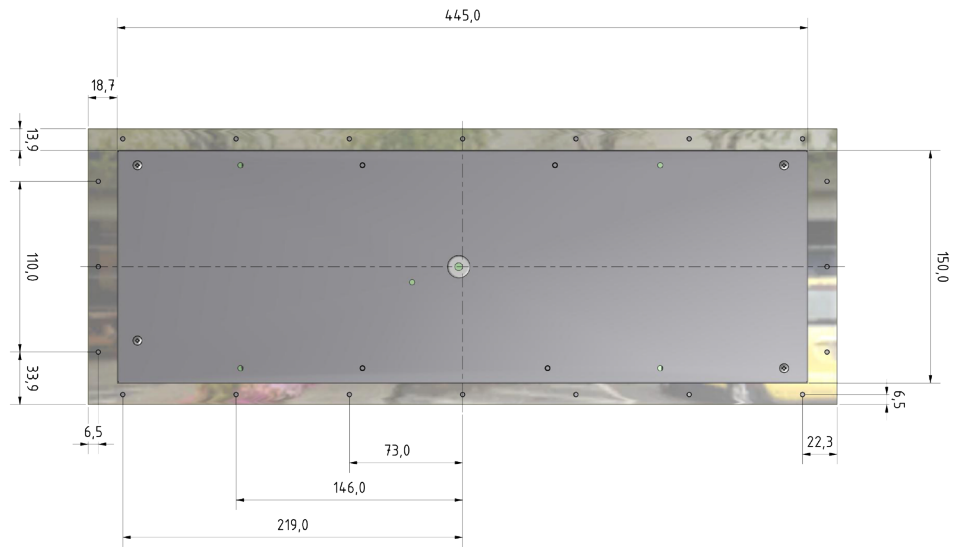

Subject to modifications and errors

GETT Gerätetechnik GmbH

Mittlerer Ring 1 | 08233 Treuen | Germany  
 Tel: +49 37468 660-0  
 Fax: +49 37468 660-66  
 E-Mail: info@gett.de  
 Internet: www.gett.de

Gett North America LLC



E-Mail: info@gett-na.com  
 Internet: www.gett-na.com

Gett Asia Ltd.

E-Mail: info@gett-asia.com  
 Internet: www.gett-asia.com

**gett.de**  
**gett-group.com**

## TECHNICAL DRAWING with EP (in mm)

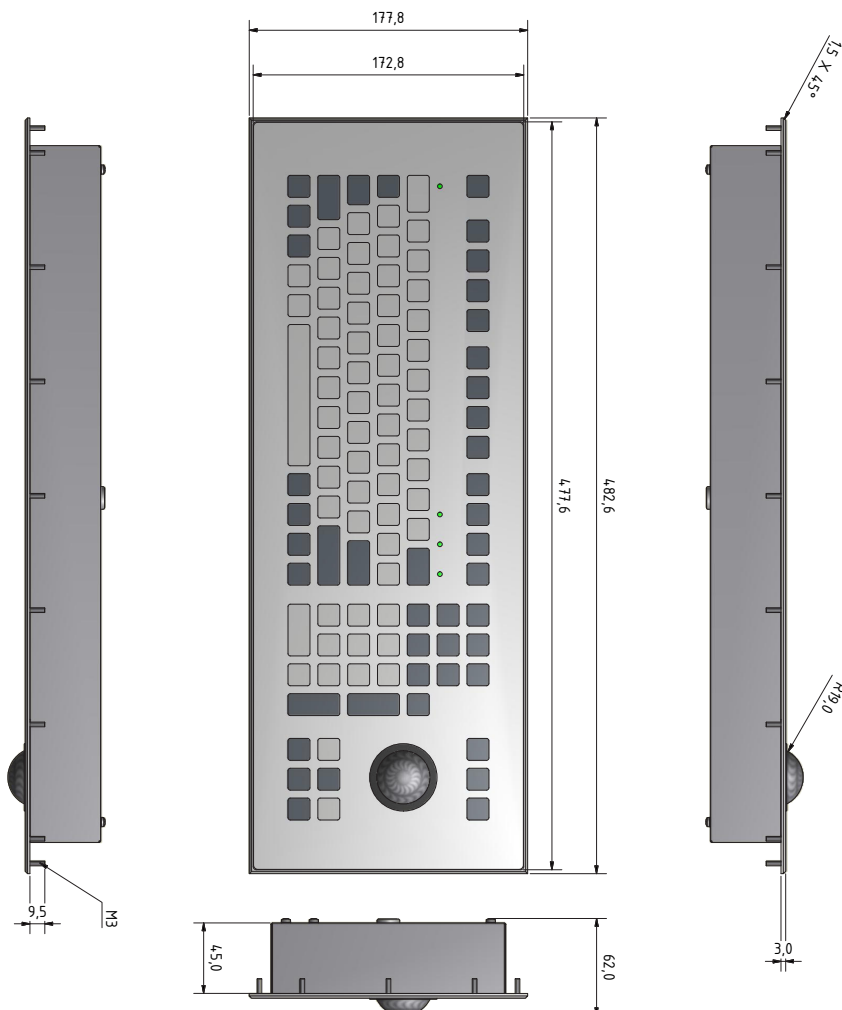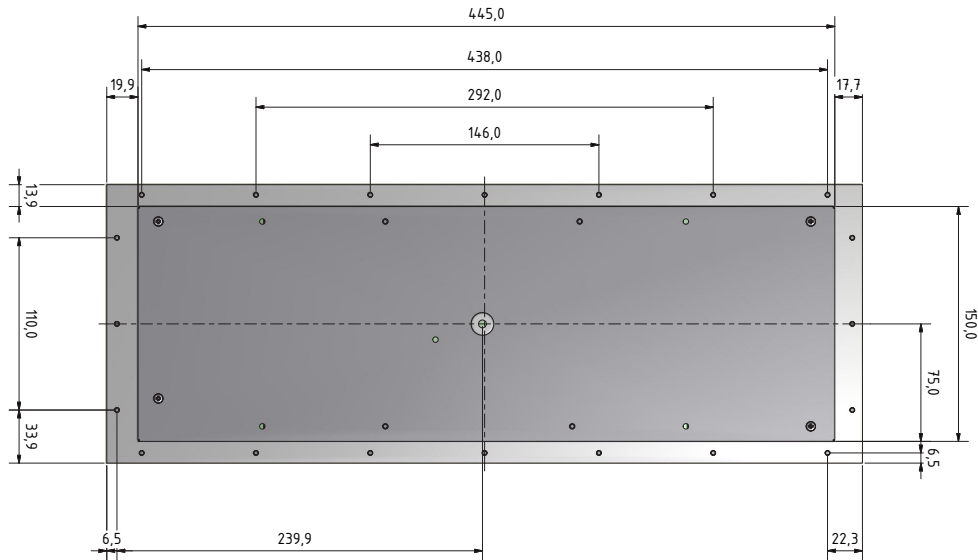

Subject to modifications and errors

GETT Gerätetechnik GmbH

Mittlerer Ring 1 | 08233 Treuen | Germany  
 Tel: +49 37468 660-0  
 Fax: +49 37468 660-66  
 E-Mail: info@gett.de  
 Internet: www.gett.de

Gett North America LLC

E-Mail: info@gett-na.com  
 Internet: www.gett-na.com

Gett Asia Ltd.

E-Mail: info@gett-asia.com  
 Internet: www.gett-asia.com